
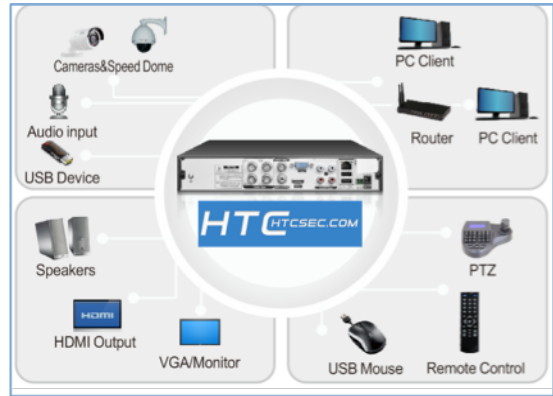


AHD5404E

AHD/NVR/DVR Three-in-one AHD

HTC HTCSEC.COM

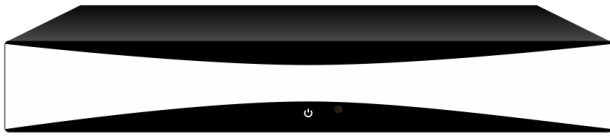

Key features

- H.264 Video compression
 - AHD/NVR/DVR Three-in-one
 - Support multi-mode switch
- AHD: 4CH*720P
 AHD+Analog: 2CH*720P
 IPC: 4CH*720P
 Synchronous palyback: D1/CIF/720P/960P

Rear Panel of AHD3404LE



1. Video input
2. Video output
3. VGA interface
4. Audio in
5. LAN network interface
6. HDMI interface
7. USB interface
8. RS-485
9. DC 12V

AHD5404E	
Video/Audio input	
Video compression	H.264
Analog video input	4PCS BNC Port(Level: 1.0Vp-p, impedance : 75Ω)
Audio compression	ADPCM
Audio input	4PCS RCA Port(Level : 2.0Vp-p, impedance : 1kΩ)
Two-way audio input	1PCS RCA Port(line level , impedance : 1kΩ)
Video/Audio output	
Multi-mode switch	AHD: 4CH*720P AHD+Analog: 2CH*720P+2CH Analog: 4CH*960H IPC: 4CH*720P
HDMI/VGA output	1024x768,1280*720,1280x1024
CVBS output	1PCS BNC Port(Level: 1.0Vp-p, impedance : 75Ω)
Encoding resolution	D1/CIF/720P/960P
Frame rate	NTSC: 1~30FPS/S; PAL: 1~25FPS/S
Video bit rate	256KB/384KB/512KB/640KB/768KB/1MB/1.5MB/2MB/2.5MB/3MB/4MB/5MB/6MB/8MB
Audio output	1PCS RCA Port(line level , impedance : 1kΩ)
Audio bit rate	16kpbs
Dual-stream	YES
Stream type	combine streams/ video stream
Playback resolution	1CH AHD 720P@25fps 4ch D1@100/120fps 4ch 720P IPC@100/120fps
Synchronous palyback	D1/CIF/720P/960P
Hard disk	
SATA	1*SATA
eSATA	No
Capacity	each port support max 4TB HDD
External interface	
Network interface	1PCS RJ45 10M / 100M adaptive Ethernet port
Serial interface	1PCS RS485
USB interface	2*USB2.0
Alarm in/out	NO
General	
Power supply	DC12V
Consumption	≤12W
Working temperature	-10°C-- + 55°C
Working humidity	10%--90%
Chassis	0.8U
Dmensions(WxDxH)	255*215*45mm
Weight	0.86kg